

Cyclops Pro Series Thermal Imaging

Thermal Imaging Monocular Cyclops 650Pro Technical Specifications

ThermTec Technology Co., Ltd. Email: info@thermeyetec.com Website: https://www.thermeyetec.com









Cyclops 650Pro

Key Features

- 640*512 thermal resolution, NETD≤25mk;
- Automatic object detection and distance measurement;
- Picture in picture function;
- 1x--6x continuous digital zoom;
- Various pesudo colors;
- Joystick control design;
- 1024*768 resolution with 0.39 inch OLED display;
- Up to 12h continuous working for lithium battery;
- WDR/object/target outline mode

Applications


- Night hunting
- Observation
- Rescue operations
- Hiking and traveling

Specifications

Model	CP650 Pro
Туре	Uncooled
Resolution	640x512
Pixel pitch	12µm
NETD	≤25mk
Spectral range	8-14µm
Frame rate	50HZ
	Optics
Objective lens	50mm (F/1.0)
Field of view	12.5° x 10°
Magnification	2.8X
Digital zoom	1 - 6X continuous zoom
Eye relief	40mm
Exit pupil	6mm
Diopter	±5D
	Display
Туре	AMOLED
Resolution	1024x768
Display size	0.39 inch
Color palette	6
Image Mode	WDR/Object/Target outline mode

Function		
Photo/Video Playback	Yes	
Language	Multiple Languages	
Built-in Memory	16GB	
PIP	Yes	
AI/MIL Distance Measurement	Yes	
Heat Track	Yes	
Real-time Notification	Yes	
OSD Recording	Yes	
	Interface	
Туре-С	Supports battery charging, data transfer and analog video output	
Wi-Fi	Two-way Wi-Fi connection; App remote control	
	Battery	
Battery Type	Internal high capacity lithium ion (18650 x 2)	
Battery Life	Continuous working time ≥12h	
Environment		
Operating temperature	-20°C~+55°C	
IP rating	IP67, 1 meter drop resistance	
Weight, g	550 (with battery)	
Dimension, mm	190(L) x 63(W) x 67(H)	
	Accessories	
External Cable	Analog video cable; USB data cable	
Other Accessories	Wrist strap; plush bag; user manual	

Accessories

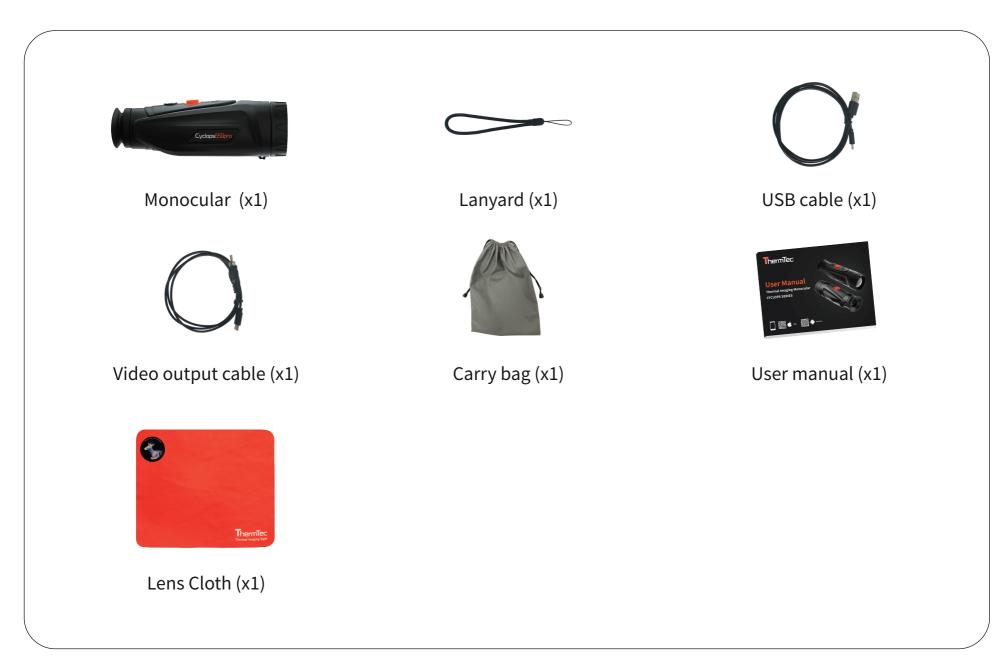

Dimension

Unit: mm

